


# HDS3200 ASI / IP Multiplexer

For Broadcast TV and IPTV Distribution of Audio/Video Content


The TeleDelta HDS3200 ASI / IP Multiplexer provides users the ability in multiplex up to 8x ASI transport streams. Output up to two ASI transport streams along with a parallel IP datastream output.

Advanced PID control allows Broadcasters to adjust and configure PID setup as required including insertion of EPG data, Conditional Access data, plus PID remapping, filtering and PSI/SI table editing.

Front panel management access and LCD display provides real-time error management and fault recording with build-in web based network management allows users to remotely manage system setup.

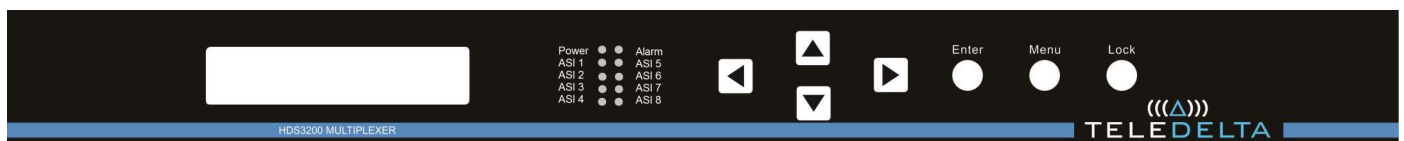

## Functional Diagram

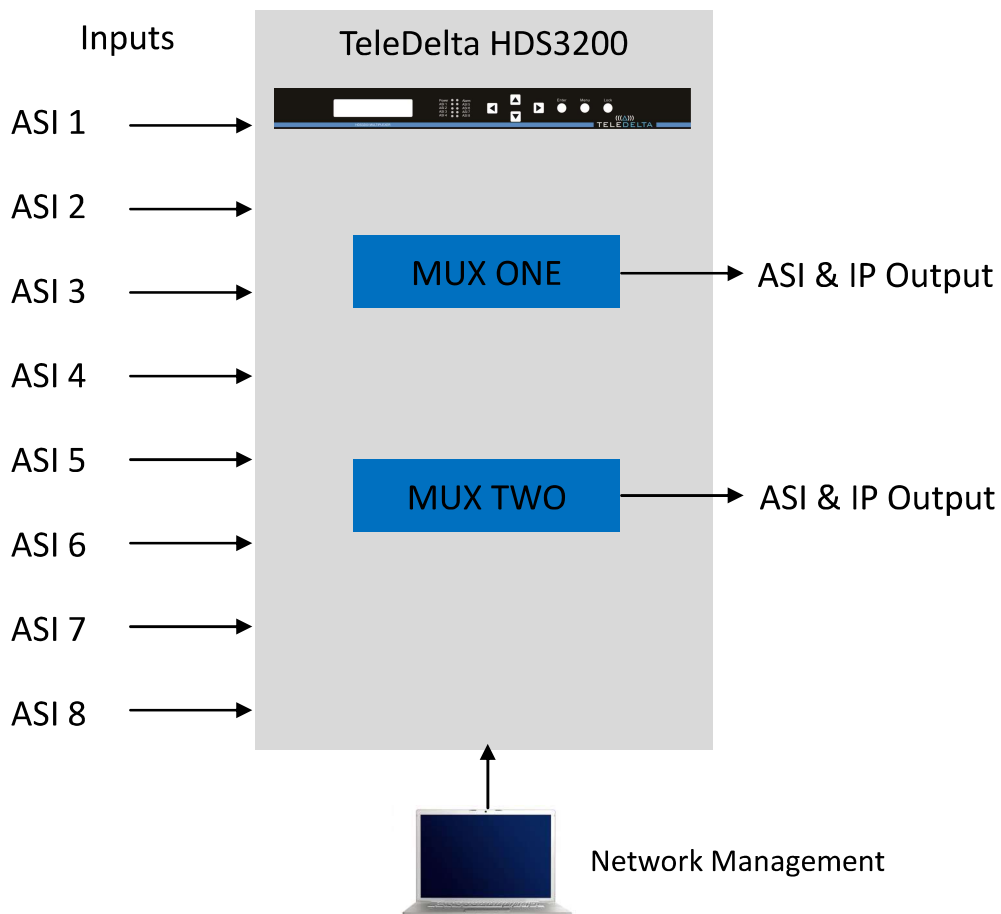

---

<b>Input Hardware:</b>	<b>8x</b>	ASI (75ohm) BNC
<b>Output :</b>	<b>2x</b>	ASI Stream (75ohm) BNC—Up to 216Mbps each
	<b>1x</b>	IP DataStream (transport stream over UDP) ASI Mirror

---



---

<b>Re-Multiplexing</b>	<ul style="list-style-type: none"> <li>2 Channels TS re-multiplex</li> <li>PID re-mapping</li> <li>PID Filtering</li> <li>PSI /SI table configuration</li> <li>EPG Insertion / Management</li> <li>Conditional Access (CA) Insertion / Management</li> </ul>
------------------------	--

<b>Management</b>	<b>Local</b>	Front Panel Control LCD and buttons
	<b>Web</b>	Built-In Network Management

<b>Physical</b>	<b>Weight</b>	5.5kgs
	<b>Dims</b>	480 x 415 x 45mm
	<b>Consumption (Approx.)</b>	20W

---

For more information please visit [www.teledelta.com](http://www.teledelta.com)

